JEMINI MESH HIGH BACK CHAIR

ASSEMBLY INSTRUCTIONS-PLEASE KEEP FOR FUTURE REFERENCE



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product during assembly, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



• We do not recommend the use of power drill/drivers *for inserting screws*,

as this could damage the unit. Only use hand screwdrivers.

• Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent,do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- Do not stand on the chair.
- Do not use this chair as step ladder.
- This product should not be discarded with household

waste. Take to your local authority waste disposal centre.

Handy Hints


- Assemble all parts and bolts loosely during assembly,only once the product is complete should you fully tighten the bolts.
- Regularly check and ensure that all bolts and fittings are tightend properly.

Components - Parts

Please check you have all the parts listed below









1 Backrest x1 2 Seat x 1

3 Left armrest x1 & Right armrest x 1







4 Seat plate x 1

5 Gas lift x 1

6 Base x 1



7 Castors x 5

Components - Fittings

Please check you have all the fittings listed below.

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A GENERAL BOITS Mex20MM x4	B • Bolts Mex35MM x6	C () Bolts M8x30MM x4
D © Washer M8x18MMx4	E ⑤ Washer M6x18MM x10	F ② Spring washer Mex4
G © Spring washer M8x4	H >> Allen key M6x1	


Assembly Instructions

Step1

Fitting the Base

a:Push all the five castors(7) into the underside of the base (6).


Insert the gaslift (5) into the base (6).

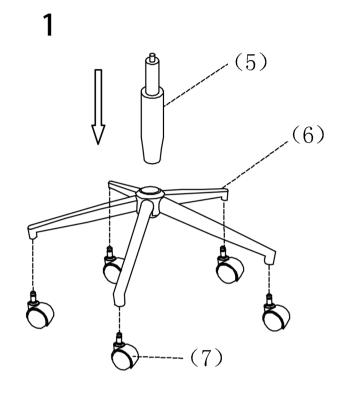

Step 2

Fitting the Armrests

Use allen key ① and bolts ② and washer ② to fix the armrests (3) and seat (2).

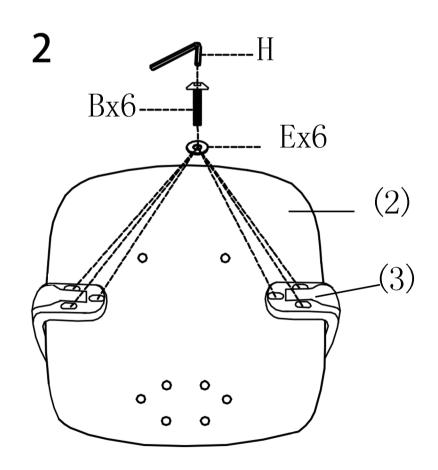


Assembly Instructions

Step 3

Fitting the Seat Cushion


Use allen key nand bolts and washer and spring washer to fix the seat plate (4) onto the seat (2), Ensure the plate (4) is fitted to the seat with correct orientation.

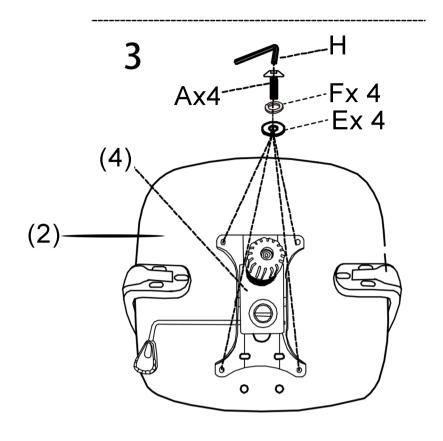

Step 4

Fitting the Backrest

Use allen key nand bolts and washer nand Spring washer to fix the backrest (1) onto the seat (2).

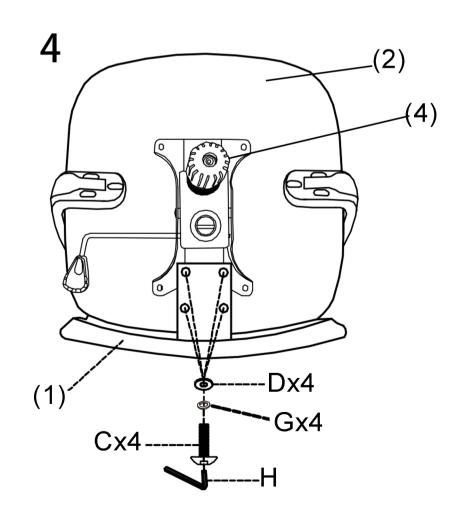

Assembly Instructions

Step 5

Carefully locate the seat (2) onto the base unit.

5

